

An IoT-Based Motorcycle Security System Using Arduino and Android for Theft Prevention

Aris Rakhmadi^{1,*}, Doni Kurnia Aji², Safiq Rosad³, Abdul Azis⁴, Retno Wahyusari⁵

^{1,2}Department of Informatics Engineering, Universitas Muhammadiyah Surakarta, Indonesia

³Department of Informatics, Universitas Nahdlatul Ulama Al Ghazali Cilacap, Jawa Tengah, Indonesia

⁴Department of Information System Universitas Amikom Purwokerto, Indonesia

⁵Department of Informatics Ronggolawe College of Technology Cepu, Indonesia

Article Info

Article history:

Received February 18, 2025

Accepted April 24, 2025

Published June 13, 2025

Keywords:

Arduino

Motorcycle Security

Android Application

Bluetooth

Smart Security System

ABSTRACT

Motorcycle theft remains a prevalent issue, especially in urban areas, where traditional security measures such as mechanical locks and ignition keys are easily bypassed. This research presents an IoT-based motorcycle security system integrating Arduino, Bluetooth communication, and an Android application to enhance theft prevention. The system employs an Arduino Uno microcontroller, HC-05 Bluetooth module, and SW-420 vibration sensor to detect unauthorized access and trigger security mechanisms. Users can remotely monitor and control their motorcycles via an Android application, which allows engine immobilization and alarm activation functions. The system was tested for hardware performance, Bluetooth connectivity, and software reliability. Results indicate that Bluetooth communication remains stable within a 10-meter range, the vibration sensor effectively detects unauthorized movements, and real-time commands between the application and Arduino execute with minimal latency. Cost analysis suggests that the system, with a total hardware cost of Rp 223,000, is an affordable and effective solution for motorcycle security. Despite some range limitations, the study demonstrates the feasibility of IoT-based security enhancements. Future improvements include GPS tracking and GSM communication for extended monitoring. This research contributes to developing innovative, cost-effective, and user-friendly vehicle security solutions.



Corresponding Author:

Aris Rakhmadi,

Department of Informatics Engineering,

Universitas Muhammadiyah Surakarta,

Ahmad Yani Street, Pabelan, Sukoharjo, Surakarta, Indonesia.

Email: *aris.rakhmadi@ums.ac.id

1. INTRODUCTION

Motorcycle theft remains a significant issue worldwide, particularly in urban areas where these vehicles are widely used due to their affordability and convenience. Despite advancements in transportation technology, traditional motorcycle security mechanisms, such as mechanical locks and ignition keys, remain vulnerable to theft. Criminals can bypass these security measures within seconds using tools such as master keys, lock-picking devices, and ignition bypass techniques [1]. The large number of motorcycle users is directly proportional to the crime rate of motor vehicle theft. Data from Statistics Indonesia notes that the rate of motor vehicle theft remains high yearly. In 2021, 18,005 motorcycle theft cases were recorded, averaging more than 1,000 monthly cases [2]. This alarming statistic underscores the need for improved security measures, as many stolen motorcycles are never recovered, highlighting the inefficiency of traditional security mechanisms. Consequently, the demand for an advanced and more secure motorcycle security system has increased, necessitating the integration of modern technological solutions.

Security systems have evolved significantly since the Internet of Things (IoT) emerged. IoT enables real-time monitoring, remote access, and automated control, making it a promising approach for improving

motorcycle security [3]. By utilizing IoT-based solutions, vehicle owners can monitor and control their motorcycles remotely through smartphones, significantly reducing the risks associated with theft. IoT-based security systems offer numerous advantages over traditional security mechanisms, including real-time alerts, automatic locking and unlocking, and seamless integration with smart devices.

Arduino, an open-source microcontroller platform, has gained popularity in developing innovative security systems due to its flexibility, affordability, and ease of programming [4], [5]. Arduino can integrate electronic components such as sensors, relays, and Bluetooth modules to create an intelligent security system [6]. Additionally, the Arduino platform supports communication with external devices, making it ideal for IoT applications, including motorcycle security systems [7]. A cost-effective and customizable security solution can be developed by leveraging Arduino to enhance motorcycle protection.

Bluetooth technology is a key component of modern wireless communication, allowing secure short-range connectivity between devices [8]. In motorcycle security applications, Bluetooth enables seamless communication between an Arduino microcontroller and a smartphone, allowing owners to control security features remotely. Bluetooth in IoT-based security systems ensures low power consumption and reliable data transmission [8]. This research explores integrating Bluetooth communication to facilitate secure and efficient interaction between the motorcycle security system and an Android-based application.

Android, the most widely used mobile operating system, is ideal for developing a user-friendly interface for motorcycle security applications [9]. With an Android-based security app, users can monitor their vehicle status, receive alerts, and control security mechanisms remotely. Integrating an Android application with Arduino-based security systems enhances user convenience, enabling secure access and real-time monitoring of motorcycle security conditions. A robust and interactive security system can be implemented by combining Android's extensive development resources with IoT capabilities [10].

The proposed IoT-based motorcycle security system integrates hardware and software components to provide enhanced protection against theft. The hardware includes an Arduino Uno microcontroller, a Bluetooth module (HC-05), a vibration sensor, and a relay module, while the software comprises an Android application developed using MIT App Inventor. This system aims to provide a comprehensive security solution by offering engine immobilization, alarm activation, and real-time notifications. These features contribute to reducing unauthorized access and improving vehicle security management.

Table 1. Summary of Relevant Theories for IoT-Enhanced Motorcycle Security

No.	Theory	Description	Relevance to the Research
1	Internet of Things (IoT)	Interconnects physical devices for remote control and automation	Enables real-time monitoring and security control for motorcycles
2	Embedded System Theory	Dedicated computing systems for specialized tasks	Arduino microcontroller manages security operations
3	Bluetooth Communication Model	Wireless communication for short-range data exchange	HC-05 Bluetooth module enables smartphone-to-motorcycle control
4	Sensor Technology	Devices that detect environmental changes and generate signals	SW-420 vibration sensor detects unauthorized movement
5	Control System Theory	Regulates system behavior based on feedback loops	Controls alarm activation and engine immobilization based on inputs
6	Human-Computer Interaction (HCI)	Optimizes user experience and usability of interfaces	Android application ensures easy interaction with security features
7	Cybersecurity in IoT	Protects connected devices from cyber threats	Secure Bluetooth pairing and encrypted data transmission
8	Economic Feasibility	Evaluate the cost-effectiveness of a solution	Low-cost Arduino-based system as an affordable security alternative
9	Smart Vehicle Security	Integrates modern security tech with vehicles	Enhances traditional motorcycle security mechanisms
10	Mobile App Development & IoT	Principles of software architecture and API integration	MIT App Inventor is used to develop the Android security app
11	Reliability Engineering	Ensures robustness and reliability of system components	System tested under various conditions for reliability
12	AI in Security	Uses machine learning for predictive analysis	Future integration of AI for advanced security monitoring

Existing motorcycle security systems often lack adaptability and are prone to bypassing methods used by thieves [3]. While some motorcycles have advanced security features, such as smart keys and GPS tracking, these solutions are often expensive and not widely available in entry-level motorcycles. By developing an IoT-

based security system using Arduino and Android, a cost-effective and customizable solution can be introduced to enhance motorcycle protection without requiring complex installations or additional infrastructure.

Various theoretical foundations are considered to ensure a comprehensive understanding of the proposed IoT-based motorcycle security system. These theories help explain the system's functionality, effectiveness, and potential improvements. Table 1 summarizes key theories relevant to the study, providing insights into their applications in enhancing motorcycle security through Arduino microcontrollers, Bluetooth communication, sensor technology, and mobile app integration.

The development of an IoT-based motorcycle security system relies on various theoretical foundations that support its design, functionality, and implementation [11]. The Internet of Things (IoT) theory enables remote monitoring and control, allowing motorcycle owners to use a smartphone application to interact with their security system. Integrating IoT allows the system to instantly provide real-time alerts and execute commands, significantly improving theft prevention measures. Embedded system theory is another fundamental aspect of the research, as the system depends on an Arduino microcontroller to manage security operations. An embedded system is a computing device designed for specific functions, such as processing sensor inputs, activating alarms, and controlling the engine immobilization feature. The Arduino platform provides flexibility and affordability, making it an ideal choice for this security solution.

Wireless communication between the motorcycle and the Android application is facilitated by Bluetooth technology, which follows the Bluetooth Communication Model. The HC-05 Bluetooth module allows seamless short-range communication, enabling users to lock or unlock their vehicles and receive security alerts through the mobile app [12]. Bluetooth's efficiency in terms of low power consumption and stable connectivity makes it a practical choice for motorcycle security applications. The sensor technology and detection mechanism are essential for identifying unauthorized access or theft attempts. The SW-420 vibration sensor detects unusual movement or tampering, triggering the alarm system and notifying the user. Sensor technology enhances the responsiveness of the security system, ensuring that any suspicious activity is immediately addressed.

Integrating control system theory ensures the motorcycle security system operates efficiently based on a feedback loop mechanism. When the sensor detects movement, the microcontroller processes the signal and executes predefined actions, such as activating the alarm or immobilizing the engine. This automated control system helps prevent unauthorized access without requiring manual intervention from the owner. User interaction is also a crucial component of the system's effectiveness. Human-Computer Interaction (HCI) theory explains how the Android application is designed to provide an intuitive and user-friendly interface. The app allows motorcycle owners to easily access security features without requiring technical expertise, ensuring accessibility for many users.

With IoT-based security systems increasingly becoming targets of cyber threats, cybersecurity principles are vital in ensuring system integrity and data protection [13]. The research incorporates secure Bluetooth pairing and encrypted data transmission to prevent unauthorized access and hacking attempts. Implementing strong authentication protocols enhances the reliability of the security system. Economic cost analysis theories, which assess the affordability and practicality of the solution, also support the feasibility of the proposed security system. Compared to commercial security products, an Arduino-based system provides a cost-effective alternative that does not compromise security effectiveness. This affordability factor is crucial for widespread adoption, especially in regions where expensive security solutions are inaccessible.

The security system aligns with trends in smart vehicle security, where modern motorcycles incorporate IoT-enabled protective measures. Many high-end motorcycles already include advanced security features like GPS tracking and smart keys [14], but these solutions are often costly. By leveraging affordable IoT technology, this research contributes to making innovative security solutions more accessible. The mobile application development process is guided by software engineering principles, particularly Model-View-Controller (MVC) architecture and API integration techniques. The research utilizes MIT App Inventor, a visual programming environment, to create an interactive and responsive application. This ensures smooth communication between the user and the hardware components, optimizing system functionality.

Reliability engineering principles are incorporated into the security system's design to ensure long-term effectiveness [15]. The hardware and software components must operate under different environmental conditions while maintaining stability. Evaluating power consumption, Bluetooth connectivity, and sensor sensitivity helps identify areas for optimization. Artificial intelligence (AI) applications in security present future possibilities for enhancing the system. AI-driven security solutions can analyze user behavior, detect anomalies, and even predict theft attempts based on real-time data patterns. While AI is not yet implemented in this study, its potential integration can improve the security system's efficiency and reliability.

One of the main challenges in implementing motorcycle security solutions is balancing security effectiveness with user convenience [16]. A security system that is too complex may discourage users from utilizing it effectively, whereas a system that is too simple may be easily compromised [17]. Therefore, this research emphasizes the importance of designing a motorcycle security system that is both secure and easy to

use. By leveraging the connectivity of IoT, users can interact with their security system remotely and receive instant notifications in case of security breaches [18].

This IoT-based security system prevents theft and serves as a deterrent [19]. The presence of an advanced security mechanism can discourage potential thieves from targeting motorcycles equipped with such systems. Moreover, remotely turning off the engine in case of unauthorized access provides an added layer of protection [20]. This feature ensures that even if a thief gains access to the vehicle, they cannot operate it, reducing the likelihood of successful theft attempts.

Security solutions in IoT-based applications are continuously evolving, and this research contributes to the ongoing development of innovative vehicle security technologies [21]. Implementing IoT-enabled security solutions is not limited to motorcycles; similar approaches can be extended to other vehicles, including cars and bicycles [22]. By developing an effective and scalable security system, this research lays the foundation for future advancements in intelligent vehicle protection, integrating additional features such as GPS tracking and biometric authentication for enhanced security.

The significance of this research lies in its ability to provide an affordable, accessible, and customizable motorcycle security solution. Unlike commercial security systems that may require expensive subscriptions or proprietary hardware, this system is designed to be open-source and adaptable, allowing users to modify and enhance their security setup as needed. This flexibility ensures that many users can benefit from the proposed system, regardless of budget constraints or technical expertise.

This research aims to advance innovative motorcycle security solutions by integrating IoT technology, Bluetooth communication, and Android-based application development. The findings will provide valuable insights for future developments in vehicle security systems and demonstrate the feasibility of cost-effective, user-friendly, and technologically advanced solutions for preventing motorcycle theft.

2. RESEARCH METHOD

The research was conducted using a combination of hardware and software development methods to design an IoT-based motorcycle security system. The primary focus was integrating an Arduino-based microcontroller with an Android application via Bluetooth. The methodology involved selecting appropriate hardware components, developing software applications, and ensuring seamless integration to achieve a functional and reliable security system.

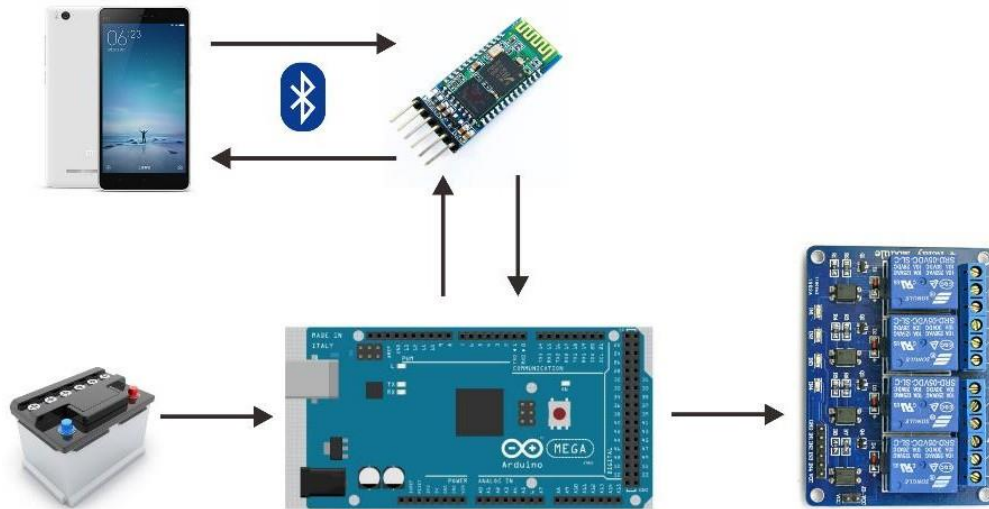


Figure 1. Hardware Architecture of the IoT-Based Motorcycle Security System

The hardware implementation in this research, as illustrated in Figure 1, comprises several key components, including an Arduino Uno R3, Bluetooth HC-05 module, SW-420 vibration sensor, four-channel relay module, and DC-DC adjustable step-down regulator. These components were meticulously chosen based on their compatibility, cost-effectiveness, and seamless integration with the motorcycle's electrical system [23]. These components were meticulously chosen to ensure compatibility with the motorcycle's electrical system, cost-effectiveness, power efficiency, reliability, and ease of implementation. Compatibility was crucial, as the components needed to integrate seamlessly without causing power fluctuations or interfering with existing functionalities. Cost-effectiveness was also considered to make the system affordable while maintaining high reliability and efficiency. Since the system relies on the motorcycle's battery, power efficiency was prioritized to minimize energy consumption and prevent excessive drain. Additionally, the selected components were chosen based on their durability and performance in real-world conditions, ensuring the stability and longevity of the security system. Lastly, ease of implementation was considered to facilitate straightforward integration

with the Arduino microcontroller and the Android application, allowing users to install and operate the system with minimal technical expertise. The Arduino Uno R3 functions as the central processing unit, responsible for interpreting commands from the Android application and managing critical security features such as engine immobilization, alarm activation, and sensor monitoring, ensuring an effective and responsive motorcycle security system.

A smartphone running the Android operating system was used to communicate with the security system via Bluetooth. The smartphone application is a remote control, allowing users to lock or unlock the engine, activate or deactivate the alarm, and monitor security alerts [24]. The Bluetooth HC-05 module establishes a wireless connection between the smartphone and the Arduino, facilitating real-time command execution. This module was chosen for its reliability in short-range communication and low power consumption, making it suitable for vehicle-based applications.

To enhance security, the system incorporates a vibration sensor (SW-420) that detects unauthorized movement or tampering with the motorcycle. The sensor is susceptible to vibrations, and when triggered, it sends signals to the Arduino, which activates the alarm and prevents unauthorized engine startup [25]. The relay module controls the motorcycle's electrical circuits, enabling the Arduino to switch the ignition and alarm system on or off based on user commands.

A power management system was implemented to ensure the stability of the security system without overloading the motorcycle's battery. The DC-DC step-down converter (LM2596) regulated the voltage from the motorcycle's battery to a safe operating level for the Arduino and other components. This regulation prevents overheating and ensures the longevity of the electronic components. Integrating the power supply with the motorcycle's battery allows continuous security system operation without requiring external power sources.

The software development for this research involved two primary tools: the Arduino IDE and MIT App Inventor. The Arduino IDE was used to program the microcontroller, defining how it processes incoming commands, interacts with sensors, and controls the relay module [26]. The programming logic included functions for handling Bluetooth communication, responding to sensor inputs, and executing security actions. The software was developed with efficiency in mind, ensuring minimal latency in processing commands and triggering security features.

The Android application was developed using MIT App Inventor, a visual programming environment for rapid prototyping and implementation[27]. The application features a simple and user-friendly interface with buttons for engine control, alarm activation, and system status monitoring. When the application is launched, it automatically checks Bluetooth availability and prompts the user to connect to the Arduino-based security system. If the connection is successful, the application allows the user to control security functions with a single tap.

The software design, illustrated in Figure 2, follows a flowchart-based approach to ensure logical execution and easy troubleshooting. The application initially attempted to establish a Bluetooth connection with the security system. The application automatically returns to the initial screen if the connection fails due to inactive Bluetooth, incorrect pairing, or a system error. Once successfully connected, the interface presents users with various security control options, allowing them to efficiently interact with and manage the motorcycle security system.

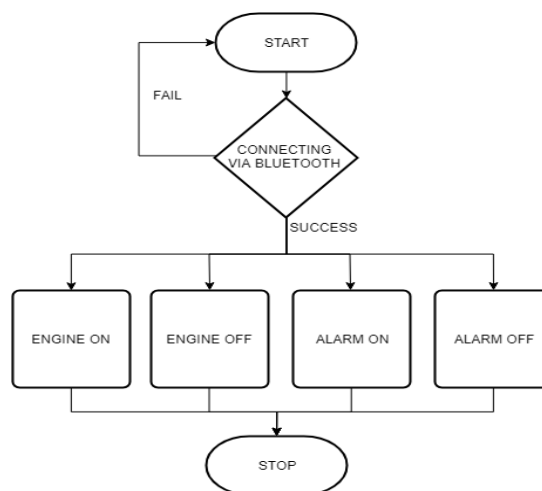


Figure 2. Flowchart of the IoT-Based Motorcycle Security System

Extensive testing was performed on the hardware and software components to validate the system's effectiveness. The Arduino code was tested for accurate command execution, ensuring that Bluetooth communication and relay control operated as expected. The vibration sensor was calibrated to detect different

levels of motion, preventing false alarms while maintaining security effectiveness. The application underwent multiple test scenarios to verify its ability to connect to the Arduino system, execute commands, and display accurate status updates.

The integration of the hardware and software components was evaluated to ensure seamless operation. Bluetooth connectivity was tested at varying distances to determine the effective range of communication between the smartphone and the security system. The response time of commands was analyzed to measure the delay between user input and system execution. The system's power consumption was monitored to ensure the motorcycle's battery could sustain continuous operation without significant depletion.

This research method effectively combined hardware and software engineering principles to develop an IoT-based motorcycle security system. The methodology ensured the system was cost-effective, user-friendly, and reliable in preventing unauthorized motorcycle access. The implementation and testing phases provided valuable insights into the system's performance, highlighting areas for potential improvement in future developments.

3. RESULTS AND ANALYSIS

This research demonstrates the successful development and implementation of an IoT-based motorcycle security system using Arduino and an Android application. The system was tested in multiple scenarios to assess its efficiency, reliability, and practicality. The evaluation was divided into two main aspects: hardware performance and software functionality. By conducting extensive tests, this study aimed to ensure that the system could effectively prevent unauthorized motorcycle access while maintaining ease of use for the owner.

As depicted in Figure 3, the hardware implementation underwent rigorous testing to ensure that each component operated as intended. The Arduino Uno functioned as the central control unit, processing input signals from the Android application and executing commands such as activating or deactivating the relay module. The Bluetooth HC-05 module established a stable and reliable connection between the Arduino and the smartphone, enabling real-time control over security functions. The SW-420 vibration sensor effectively detected movement and promptly triggered the alarm in response to unauthorized tampering with the motorcycle. Each component was tested individually and in combination to validate their integration, responsiveness, and overall system reliability.

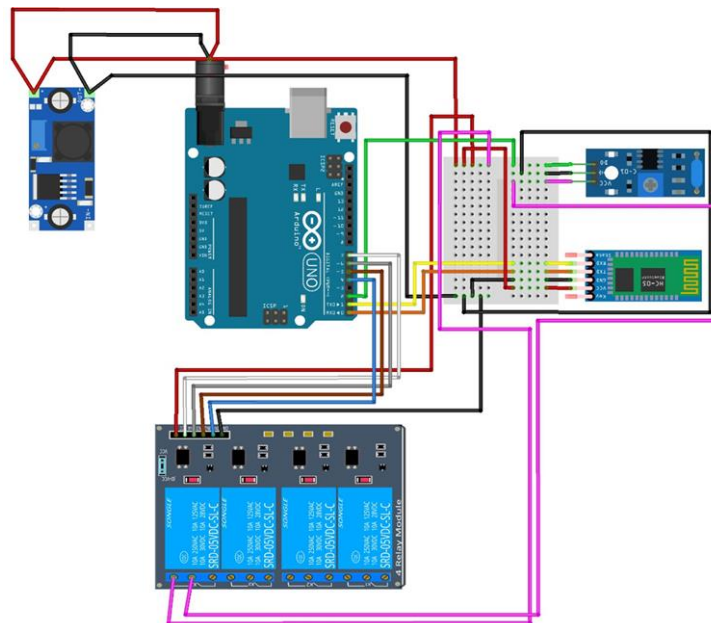


Figure 3. Hardware Implementation and System Integration of the IoT-Based Motorcycle Security System

Power management was a critical aspect of the hardware evaluation. The system was designed to draw power from the motorcycle's battery, with a DC-DC step-down converter regulating voltage to prevent overloading sensitive electronic components. The power consumption was measured to ensure the security system could operate without significantly draining the battery. The results confirmed that the system maintained efficient power usage while ensuring continuous operation, proving it sustainable for long-term use.

Software testing, as illustrated in Figure 4, was conducted to validate the functionality of the Android application and its communication with the hardware components. The application successfully established a

Bluetooth connection with the module, enabling users to control the engine and activate or deactivate the alarm remotely. The interface was evaluated for responsiveness, ensuring all security features operated with minimal latency. Bluetooth connectivity was tested across various distances, confirming stable communication up to 10 meters. However, connection reliability declined beyond this range, presenting a potential limitation that could be addressed through future enhancements, such as integrating alternative wireless communication technologies for extended range and improved reliability.

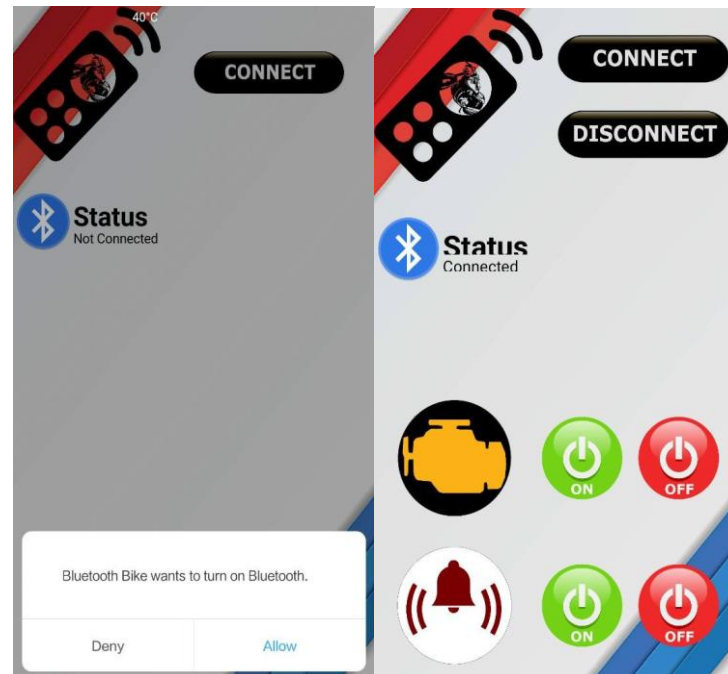


Figure 4. Software Testing and Bluetooth Communication Performance of the IoT-Based Motorcycle Security System

The system's security features were tested under simulated theft attempts. When the unauthorized movement was detected, the vibration sensor immediately sent a signal to the Arduino, which activated the alarm and disabled the engine through the relay module. The system's reaction time was measured, and results indicated that the response occurred within milliseconds, providing immediate deterrence against potential theft. This level of responsiveness is crucial in preventing successful unauthorized access to the motorcycle.

Table 2. Hardware Performance Evaluation Results of the IoT-Based Motorcycle Security System

NO	Testing	Test Case	Expected Result	Test Result
1	Bluetooth	Connected to a smartphone via Bluetooth	Bluetooth is connected	Successful
2	Relay	Sent high or low logic signals	Relay turns on and off	Successful
3	Vibration Sensor	Given vibration input	Sends data output to Arduino	Successful

Black-box testing evaluated the system's reliability in real-world conditions, focusing on hardware performance (Table 2) and software functionality (Table 3). The assessment confirmed that all key security features, including engine immobilization, alarm activation, and real-time notifications, operated as expected. The Bluetooth connection was tested under various environmental conditions to assess its stability and effectiveness. While the system demonstrated consistent performance in open areas, occasional interference from physical obstacles and electronic devices affected connectivity, highlighting potential areas for future optimization and enhancement.

Another critical aspect of the analysis was user interaction and ease of operation. The Android application was designed to be simple and intuitive, allowing motorcycle owners to access and control security features quickly. User feedback from initial trials indicated that the system was easy to operate and provided a sense of security. However, some users suggested improvements such as an extended Bluetooth range or alternative communication methods like GSM for remote access beyond 10 meters.

Table 3. Software Functionality Testing Results of the IoT-Based Motorcycle Security System

No	Testing	Test Case	Expected Result	Test Result
1	Bluetooth Bike Application	Check whether Bluetooth is active; if not, a notification prompts activation.	Checks Bluetooth status and activates it	Successful
2	Connect Button	Connects to the Arduino Bluetooth module	Bluetooth is connected	Successful
3	Engine Button	Turns the engine on or off	Controls the engine	Successful
4	Alarm Button	Turns the alarm on or off	Controls the alarm	Successful

The security system's cost analysis, presented in Table 4, was conducted to evaluate its feasibility as a commercial product. The estimated hardware cost amounted to Rp 223,000, positioning it as a cost-effective alternative to conventional motorcycle security systems. Based on market research, existing motorcycle security systems offered by various companies range in price from Rp 500,000 to Rp 2,000,000, depending on their features and brand reputation. Most commercial systems include GPS tracking and GSM connectivity, contributing to higher costs. In contrast, the proposed system provides essential security features such as engine immobilization, alarm activation, and real-time monitoring at a significantly lower price. While it lacks GPS tracking, it offers a cost-effective solution for users seeking affordable theft prevention. With its low cost and high efficiency, this system offers a practical and affordable security solution, making it an attractive option for motorcycle owners seeking advanced protection without excessive expenses.

Table 4. Cost Estimation of the IoT-Based Motorcycle Security System

No	Component Name	Price (Rp)
1	Arduino Uno R3 + USB Cable	Rp 81,000
2	LM2596 DC-DC Adjustable Stepdown	Rp 11,000
3	HC-05 Bluetooth Transceiver	Rp 50,000
4	5V 4-Channel Relay	Rp 41,000
5	Mini Breadboard	Rp 8,000
6	SW-420 Vibration Sensor	Rp 11,000
7	DC Jack	Rp 5,000
8	Jumper Cables (Pack of 20)	Rp 16,000
Total		Rp 223,000

The research findings also highlighted potential limitations and areas for improvement. While the system performed efficiently in controlled environments, Bluetooth range constraints limit its applicability in larger areas. Additionally, the reliance on the motorcycle's battery for power, though efficient, requires further evaluation to ensure long-term sustainability. Future enhancements could include integrating GPS tracking for theft recovery and incorporating cloud-based data storage for enhanced security monitoring.

The results confirm that the developed security system successfully meets its objectives of providing an effective, low-cost, and user-friendly motorcycle security solution. Combining IoT-based technology, Bluetooth communication, and an Android interface offers an innovative approach to preventing motorcycle theft. With further enhancements and optimizations, this system has the potential to set a new standard for innovative vehicle security solutions.

4. CONCLUSION

This research successfully developed and tested an IoT-based motorcycle security system integrating Arduino, Bluetooth communication, and an Android application. The system effectively prevented unauthorized access through key security features such as engine immobilization, alarm activation, and real-time monitoring. Testing results confirmed that Bluetooth connectivity remained stable within a 10-meter range, and the vibration sensor accurately detected unauthorized movement, triggering the security response immediately. The system's affordability, with a total hardware cost of Rp 223,000, makes it a viable solution for motorcycle owners seeking an enhanced yet cost-effective security mechanism.

Despite its effectiveness, some limitations were observed, including Bluetooth range constraints and dependence on the motorcycle's battery. Future improvements should include integrating GPS tracking for theft recovery, GSM communication for remote access beyond Bluetooth range, and enhanced power management solutions to ensure long-term usability. This research contributes to advancing IoT-based security solutions for motorcycles, demonstrating the potential for scalable and customizable innovative security systems that can be extended to other vehicle types.

REFERENCES

- [1] K. Gupta, N. Jiwani, M. H. U. Sharif, M. A. Mohammed, and N. Afreen, "Smart Door Locking System Using IoT," in *2022 International Conference on Advances in Computing, Communication and Materials (ICACCM)*, 2022, pp. 1–4. doi: 10.1109/ICACCM56405.2022.10009534.
- [2] M. Yusro, W. Djatmiko, C. A. P. Kirana, D. Rohmadon, R. R. Al-Hakim, and A. Pangestu, "Mo-SSeS: A Motorcycle Smart Security System Using Raspberry Pi Based on the Internet of Things," in *International Conference on Artificial Intelligence and Mechatronics System, AIMS 2024*, Institute of Electrical and Electronics Engineers Inc., 2024. doi: 10.1109/AIMS61812.2024.10512991.
- [3] E. A. Z. Hamidi, M. R. Effendi, E. Mulyana, and R. Mardiaty, "Implementation security system using motorcycle fingerprint identification and notification Telegram," *Telkomnika (Telecommunication Computing Electronics and Control)*, vol. 21, no. 1, pp. 88–96, Feb. 2023, doi: 10.12928/TELKOMNIKA.v21i1.24250.
- [4] A.-N. Sharkawy, M. Hasanin, M. Sharf, M. Mohamed, and A. Elsheikh, "Development of Smart Home Applications Based on Arduino and Android Platforms: An Experimental Work," *Automation*, vol. 3, no. 4, pp. 579–595, 2022, doi: 10.3390/automation3040029.
- [5] S. Achmad, R. Adinugroho, N. S. Hendrawan, and T. Franklin, "IoT Based Vehicle Safety Controller Using Arduino," *Engineering, Mathematics and Computer Science (EMACS) Journal*, vol. 5, no. 1, pp. 1–6, Jan. 2023, doi: 10.21512/emacsjournal.v5i1.9251.
- [6] K. C. Arun, S. Ahmad, S. Noor, I. Mumtaz, and M. Ali, "Arduino Based Secure Electronic Voting System with IoT and PubNub for Universities," in *2022 Second International Conference on Advanced Technologies in Intelligent Control, Environment, Computing & Communication Engineering (ICATIECE)*, 2022, pp. 1–5. doi: 10.1109/ICATIECE56365.2022.10047605.
- [7] R. K. Kanna, L. K. Hema, V. S. Ramya, N. Kripa, R. Gomlavalli, and A. Ambikapathy, "Smart Electronic Arm Module using Arduino Applications," in *2022 IEEE International Conference on Current Development in Engineering and Technology (CCET)*, 2022, pp. 1–5. doi: 10.1109/CCET56606.2022.10080068.
- [8] R. Y. Afif, A. Widjaja, A. Yonatan, F. Efendy, M. G. R. Ramadhan, and B. Siswanto, "Smart Home Monitoring to Improve Valuable Storage Security Using IoT-Bluetooth," *Procedia Comput Sci*, vol. 227, pp. 1077–1085, 2023, doi: <https://doi.org/10.1016/j.procs.2023.10.618>.
- [9] S. A. Ajagbe, O. A. Adeaga, O. O. Alabi, A. B. Ikotun, M. A. Akintunde, and M. O. Adigun, "Design and development of arduino-based automation home system using the internet of things," *Indonesian Journal of Electrical Engineering and Computer Science*, vol. 33, no. 2, pp. 767–776, Feb. 2024, doi: 10.11591/ijeecs.v33.i2.pp767-776.
- [10] R. Khairunisa and R. Hidayat, "Vehicle Starter System for Safety Based Microcontroller Using Internet of Things," *TEKNOKOM*, vol. 6, no. 1, pp. 36–42, Mar. 2023, doi: 10.31943/teknokom.v6i1.113.
- [11] A. A. Saputra, V. Suryani, and A. Rakhmatsyah, "Prototype of Iot-Based Keyless Security System For Motorcycle," in *2023 6th International Conference on Information and Communications Technology (ICOIACT)*, 2023, pp. 17–22. doi: 10.1109/ICOIACT59844.2023.10455891.
- [12] A. Nelwan, P. Manembu, A. Wauran, F. Manoppo, and C. Mamahit, "Wireless Residential Electric Controller Using Arduino Uno and Bluetooth Module HC-05," *EDUNITRO Jurnal Pendidikan Teknik Elektro*, vol. 3, no. 1, pp. 9–18, Feb. 2023, doi: 10.53682/edunitro.v3i1.5408.
- [13] R. Agrawal, N. Faujdar, P. Kumar, and A. Kumar, "Security and Privacy of Blockchain-Based Single-Bit Cache Memory Architecture for IoT Systems," *IEEE Access*, vol. 10, pp. 35273–35286, 2022, doi: 10.1109/ACCESS.2022.3162890.
- [14] P. Helo and V. V. Thai, "Logistics 4.0 – digital transformation with smart connected tracking and tracing devices," *Int J Prod Econ*, vol. 275, p. 109336, 2024, doi: <https://doi.org/10.1016/j.ijpe.2024.109336>.
- [15] P. Bellini, P. Nesi, and G. Pantaleo, "IoT-Enabled Smart Cities: A Review of Concepts, Frameworks and Key Technologies," *Applied Sciences*, vol. 12, no. 3, 2022, doi: 10.3390/app12031607.
- [16] R. Plšičič and J. Šedo, "Smart Security Systems for motorbikes," in *2022 ELEKTRO (ELEKTRO)*, 2022, pp. 1–6. doi: 10.1109/ELEKTRO53996.2022.9803413.
- [17] I. P. Sari, A.-K. Al-Khowarizmi, P. P. H. MD, A. Perdana, and A. A. Manurung, "Implementation And Design of Security System On Motorcycle Vehicles Using Raspberry Pi3-Based GPS Tracker And Facedetection," *Sinkron : jurnal dan penelitian teknik informatika*, vol. 7, no. 3, pp. 2003–2007, Aug. 2023, doi: 10.33395/sinkron.v8i3.12935.
- [18] M. Darji, N. Parmar, Y. Darji, and S. Mehta, "A Smart Home Automation System Based on Internet of Things (IoT) Using Arduino," in *Futuristic Trends in Networks and Computing Technologies*, P. K. Singh, S. T. Wierchoń, J. K. Chhabra, and S. Tanwar, Eds., Singapore: Springer Nature Singapore, 2022, pp. 279–293.
- [19] S. A. Shaban, "A Smart System for the University Chemical Laboratory Using IoT," *Journal of Advances in Information Technology*, vol. 15, no. 1, pp. 104–117, 2024, doi: 10.12720/jait.15.1.104-117.
- [20] G. Verma, S. Pachauri, A. Kumar, D. Patel, A. Kumar, and A. Pandey, "Smart Home Automation with Smart Security System over the Cloud," in *2023 14th International Conference on Computing Communication and Networking Technologies (ICCCNT)*, 2023, pp. 1–7. doi: 10.1109/ICCCNT56998.2023.10306548.
- [21] M. A. Khan *et al.*, "Smart Android Based Home Automation System Using Internet of Things (IoT)," *Sustainability*, vol. 14, no. 17, 2022, doi: 10.3390/su141710717.
- [22] N. Solangi, A. Khan, M. F. Qureshi, N. Zaki, U. M. Qureshi, and Z. Umair, "IoT Based Home Automation System: Security Challenges and Solutions," in *2024 5th International Conference on Advancements in Computational Sciences (ICACS)*, 2024, pp. 1–6. doi: 10.1109/ICACS60934.2024.10473277.
- [23] M. Ghai and R. Gupta, "Structure of an Arduino Based Home Security Automation System," in *2023 International Conference on Computational Intelligence, Communication Technology and Networking (CICTN)*, 2023, pp. 225–227. doi: 10.1109/CICTN57981.2023.10141037.

- [24] P. Yakaiah, P. Bhavani, B. Kumar, S. Masireddy, and P. Elari, "Design of an IoT-Enabled Smart Safety Device," in *2022 International Conference on Advancements in Smart, Secure and Intelligent Computing (ASSIC)*, 2022, pp. 1–5. doi: 10.1109/ASSIC55218.2022.10088332.
- [25] A. Ramkumar, T. Vaigaiselvam, S. Rajendran, S. Saravanel, A. Kamalesh, and K. Rajesh, "Android Controlled Smart Home Automation with Security System," in *2022 2nd International Conference on Advance Computing and Innovative Technologies in Engineering (ICACITE)*, 2022, pp. 1245–1249. doi: 10.1109/ICACITE53722.2022.9823575.
- [26] P. F. Gabriel and Z. Wang, "Design and Implementation of Home Automation system using Arduino Uno and NodeMCU ESP8266 IoT Platform," in *2022 International Conference on Advanced Mechatronic Systems (ICAMechS)*, 2022, pp. 161–166. doi: 10.1109/ICAMechS57222.2022.10003361.
- [27] N. H. Qasim, F. Rahim, and N. Bodnar, "A comprehensive investigation of an LTE-enabled smart door system using the Arduino UNO," *Edelweiss Applied Science and Technology*, vol. 8, no. 4, pp. 697–708, 2024, doi: 10.55214/25768484.v8i4.1446.