

LATTICE BOLTZMANN PSEUDO-POTENTIAL MODELLING OF MULTIPHASE DROPLET PHENOMENA

Thomas Ken Darmastono¹, Bahrul Jalaali^{2,*}

¹Department of Informatics, Sekolah Tinggi Teknologi Adisutjipto

²Department of Mechanical Engineering, Sekolah Tinggi Teknologi Adisutjipto
Janti St, Block R Lanud Adisutjipto, Bantul, DIY, Indonesia

Email corresponding: *Bahrul@stta.ac.id

Received: November 18, 2020; Accepted : December 7, 2020; Published : December 8, 2020

Abstract

The multiphase modeling of a droplet in a multiphase system is considered becoming a fundamental problem in fluid dynamics. A complex understanding of droplet behavior is critical to reveal a deeper insight into a more complex multiphase system. Droplet behavior studies are necessary to obtain a better understanding of solving multiphase problems in both the science and industrial aspect. The droplet behavior is characterized by a non-dimensional number such as the Eötvös number. In this study, numerical simulation was performed using the Lattice Boltzmann method. Parametric studies of Eötvös number was done. The parametric study of the Eo number is obtained using LBM. Based on the results obtained, it is concluded that the gravitational force influences the downwards rate of the droplet. Furthermore, the shape of the droplet during falling was depended on the Eo number as well. The higher Eo number means higher gravitational force, hence the velocity of the droplet is increasing as well as the reaction force of surface tension. This study is beneficial to give a deeper explanation of multiphase phenomena as well as contribute to the modeling of multiphase phenomena using an alternative numerical method of LBM.

Keyword: Lattice Boltzmann method, Numerical, Droplet, Eötvös number

1. Introduction

The multiphase modeling of a droplet in a multiphase system is considered becoming a fundamental problem in fluid dynamics [1]. A complex understanding of droplet behavior is critical to reveal a deeper insight into a more complex multiphase system such as spray cooling [2,3], nuclear waste management [4,5], soil-vapor extraction [6-8], ink-jet printing [9,10], and droplet spreading related to covid-19 phenomena [11]. The droplet behavior is characterized by a non-dimensional number such as the Eötvös number which is defined as the ratio of gravitational force towards the interfacial tension. This dimensionless number represents the shape of a droplet moving in both certain surrounding fluid and gravitational force effects. Droplet behavior studies are necessary to obtain a better understanding of solving multiphase problems in both the science and industrial aspect.

In general, the parametric study based on the Eötvös number can be done by analytical approach, experimental apparatus as well as numerical simulation. However, the first approximation of an analytical solution is only limited by a simple problem. Furthermore, the experimental procedure provides actual data and conditions. Previous experimental studies have been conducted by Roisman et al [12], Bird et al [13], and Farhangi et al [14]. Those studies were clarified that droplet behavior plays an important role

in the multiphase dynamics analysis. Unfortunately, due to its complex setup and costly, some experimental approach is considered to be difficult to overcome. Various numerical investigations have also been conducted by previous studies. Bussmann et al [15] applied the volume-of-fluid (VOF) method to simulate the splashing droplet impact phenomena. It was obtained that the contact angle was an important parameter in the development of splash phenomena. Tasoglu et al [16] simulated the impact of the droplet by using the front-tracking method. The demonstration revealed that droplet inner deformation was increasing in accordance with the Reynolds number and surface tension ratio of air to the droplet. Zheng et al [17] recently found that the finite-volume-based method was able to simulate the droplet impact as well as temperature parameter. Mehdi-Nejad et al [18] used the VOF model to observe the effect of air bubble entrapment on the droplet impact.

A lot of work has been performed on the droplet impact investigation, but some issues are not addressed yet, for instance, the effect of impact velocity, gravitational force, and droplet impact behavior are not considered. In this study, the numerical investigation of droplet impact as well as the gravitational force is performed by using a parametric study of Eötvös number. Furthermore, the Lattice Boltzmann method (LBM) as an alternative method considerably more efficient numerical method than Navier-Stokes (N-S) equation solver has been used in several studies [19]. The numerical simulations in this paper were carried out using the pseudo-potential lattice Boltzmann method (LBM) that has emerged as a useful approach for computational fluid dynamics analysis. The LBM uses a discretization based on the mesoscopic kinetic equation. It relatively is easier to handle multiphase flow which is difficult to be solved in the conventional method based on the N-S equation. The rest of the paper is organized as follows: Sec. 2, the brief of LBM methodology is presented. In section 3, we give the numerical results of the droplet simulation as well as the parametric study of the Eötvös number. A brief of trademark conclusion is given in section 4.

2. Method

The lattice Boltzmann method emerges as a powerful tool for numerical simulations for this decade [20]. One of the most efficient LBM methods is the pseudopotential Shan-Chen method [21]. The Shan-Chen LBM considers a behavior between particles and their neighbor. This method uses pseudopotential forces as a form of particle interaction. The fluid motion is represented by a distribution of particles stated by using distribution functions. Those particles are experiencing a collision and streaming that is discretized based on Bhatnagar-Gross-Krook (BGK) collision operator as shown in Eq (1). The left operator indicates the streaming terms, besides the right one is the collision operator

$$f_i(\mathbf{x} + \mathbf{e}_i \Delta t, t + \Delta t) - f_i(\mathbf{x}, t) = -\frac{1}{\tau} \left(f_i(\mathbf{x}, t) - f_i^{eq}(\mathbf{x}, t) \right) + F_i(\mathbf{x}, t) \quad (1)$$

$$f_i^{eq}(\mathbf{x}, t) = w_i \rho \left[1 + \frac{\mathbf{e}_i \cdot \mathbf{u}}{c_s^2} + \frac{(\mathbf{e}_i \cdot \mathbf{u})^2}{2c_s^4} - \frac{(\mathbf{u})^2}{2c_s^2} \right] \quad (2)$$

$$\rho = \sum_i f_i \quad (3)$$

$$\mathbf{u} = \frac{1}{\rho} \sum_i f_i \mathbf{e}_i \quad (4)$$

Where, $f_i(\mathbf{x}, t)$ is the function of density distribution, $f_i^{eq}(\mathbf{x}, t)$ is the equilibrium distribution function, \mathbf{x} is the position, t is the time, c is the lattice speed ($\Delta x / \Delta t$) and i denotes the lattice direction. The fluid density (ρ) and velocity (\mathbf{u}) are calculated by using Eqs. (3) and (4). After the collision, the particles will reach an equilibrium state within a certain time which is noted as relaxation time (τ). The equilibrium distribution function is shown in Eq (2). τ is related to

the viscosity as $\nu = c_s^2(\tau - 0.5)\Delta t$. c_s is the lattice sound speed where sets as $\frac{c^2}{3}$. The grid spacing (Δx) and timesteps (Δt) are set to 1. The simulation uses the 3D model of D3Q19 with 19 velocity directions at a given point (Fig. 1). The discrete velocity is shown below:

$$\begin{aligned}
 & [e_0 \ e_1 \ e_2 \ e_3 \ e_4 \ e_5 \ e_6 \ e_7 \ e_8 \ e_9 \ e_{10} \ e_{11} \ e_{12} \ e_{13} \ e_{14} \ e_{15} \ e_{16} \ e_{17} \ e_{18}] \\
 & = c \begin{bmatrix} 0 & 1 & -1 & 0 & 0 & 0 & 0 & 1 & -1 & 1 & -1 & 1 & -1 & 1 & -1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & -1 & 0 & 0 & 1 & 1 & -1 & -1 & 0 & 0 & 0 & 0 & 1 & -1 & 1 & -1 \\ 0 & 0 & 0 & 0 & 0 & 1 & -1 & 0 & 0 & 0 & 0 & 1 & 1 & -1 & -1 & 1 & 1 & -1 & -1 \end{bmatrix}
 \end{aligned}$$

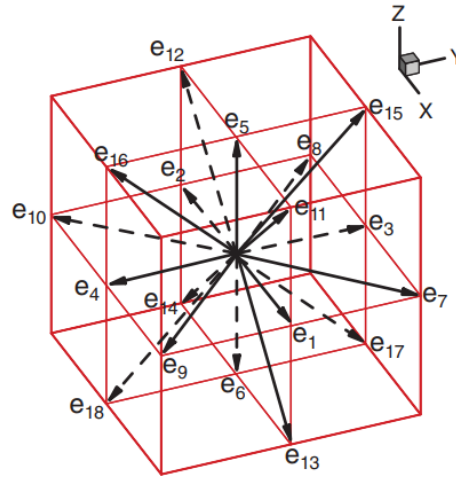


Figure 1. LBM discrete velocity models for D3Q19 [21].

Meanwhile, the weighting factors (w_i) are given by as follows:

$$w_i = \left\{ \begin{array}{ll} \frac{1}{3} & (i = 0) \\ \frac{1}{18} & for \ (i = 1 - 6) \\ \frac{1}{36} & (i = 7 - 18) \end{array} \right\}$$

In the Shan-Chen model, the fluid interaction force causes the phase separation and is stated in Eq (5). The terms of σ denotes the component of fluid. Where G is the parameter that control the strength of inter-particle force. ψ is the mean-field potential that is shown in Eq 6. Considering the Shan-Chen forces, the value of fluid velocity (Eq 4) is modified shown in Eq 7. In this study, the relaxation time of both fluid is assumed to be equal. ρ_0 is the normalization constant which is adjusted as 1.

$$F_\sigma(\mathbf{x}, t) = -G\psi(\mathbf{x}, t) \sum_i w_i \psi(\mathbf{x} + \mathbf{e}_i \Delta t, t) \mathbf{e}_i \quad (5)$$

$$\psi(\rho) = \psi_0 \left[-\exp\left(-\frac{\rho}{\rho_0}\right) \right] \quad (6)$$

$$\mathbf{u}' = \frac{\sum_\sigma (\sum_i f_i^\sigma \mathbf{e}_i)}{(\sum_\sigma \frac{\rho_\sigma}{\tau_\sigma})} + \frac{\tau_\sigma F_\sigma}{\rho_\sigma} \quad (7)$$

In this model, the half bounce-back boundary condition is chosen at the top and the bottom walls. The right, left, front and back walls are using periodic boundary condition. The

simulation results are represented in dimensionless quantities In this paper, the dimensionless parameters that will be analyzed is Eötvös number (Eo). Here, the non-dimensional parameters related to the development of droplet are defined, as follows:

$$Eötvös\ Number\ (Eo) = \frac{g\Delta\rho 4R^2}{\sigma}$$

$$t = \frac{t_{lbm}}{\sqrt{\frac{2R}{g}}}$$

Where, R is the droplet radius, body force of gravitational acceleration is represented by g , U_0 is the impact velocity of droplet, μ_d relates to the droplet viscosity, ρ_l is the droplet density and σ denotes the surface tension between droplet and surrounding fluid.

The numerical simulation is performed by using C programming language. The code is calculated using open-source compiler, Codeblock. Meanwhile, the post-processing process was done by using open source software, Paraview. The typical numerical calculation was about 4 hours of computational time for each case.

3. Result and Discussion

The Eötvös number is measuring the effect of gravitational forces compared to the droplet surface tension. It is used to determine the shape of droplets moving in a certain surrounding fluid. In this study, the radius of droplet sets to 12 with fixed Ohnesorge Number (Oh) = 0.1. Dimensionless Ohnesorge (Oh) number relates to the ratio of internal viscous dissipation to the surface tension. The lower Oh means the weaker friction force due to the viscous force. The Oh can be written in terms of the square root of the Weber number to the Reynolds number. Hence, by assuming a fixed value of Oh, the effect of the droplet is only influenced by gravitational force in terms of Eo. Simulation domain sets to 151x301x80 within the 3D-lattice domain. The numerical variations are shown in Table 1.

Table 1. Cases of different gravity force with respect to Eötvös number

	Gravity Force (lu/t^2)	Eo
Case A	5E-05	11
Case B	1E-04	22
Case C	2E-04	43

The simulation results for each case are shown in Fig.1. Based on those results, can be seen that the shape of the droplet for case A is perfectly symmetrically rounded. However, for case B and C, the shape of droplets begin to be deformed as an oval form. This phenomenon relates to the previous studies [1,19]. The droplet shape changed is caused by the interaction between gravitational force and surface tension. Hence, for each Eo number is obtained distinction results of droplet form. The gravitational force which is perpendicular with surface tension produces the action-reaction force. Further, the gravitational force leads the droplet to move downwards at a certain velocity and acceleration. In linear, the higher gravitational force yields a higher value of force action-reaction towards surface tension as stated by the 3rd law of Newton. The droplet that is pressed by a couple of perpendicular

forces exerts the water into the radial axis. Thus, it produces the oval form of a droplet. It also can be found that weaker Eo will delay the droplet falling and remains its form.

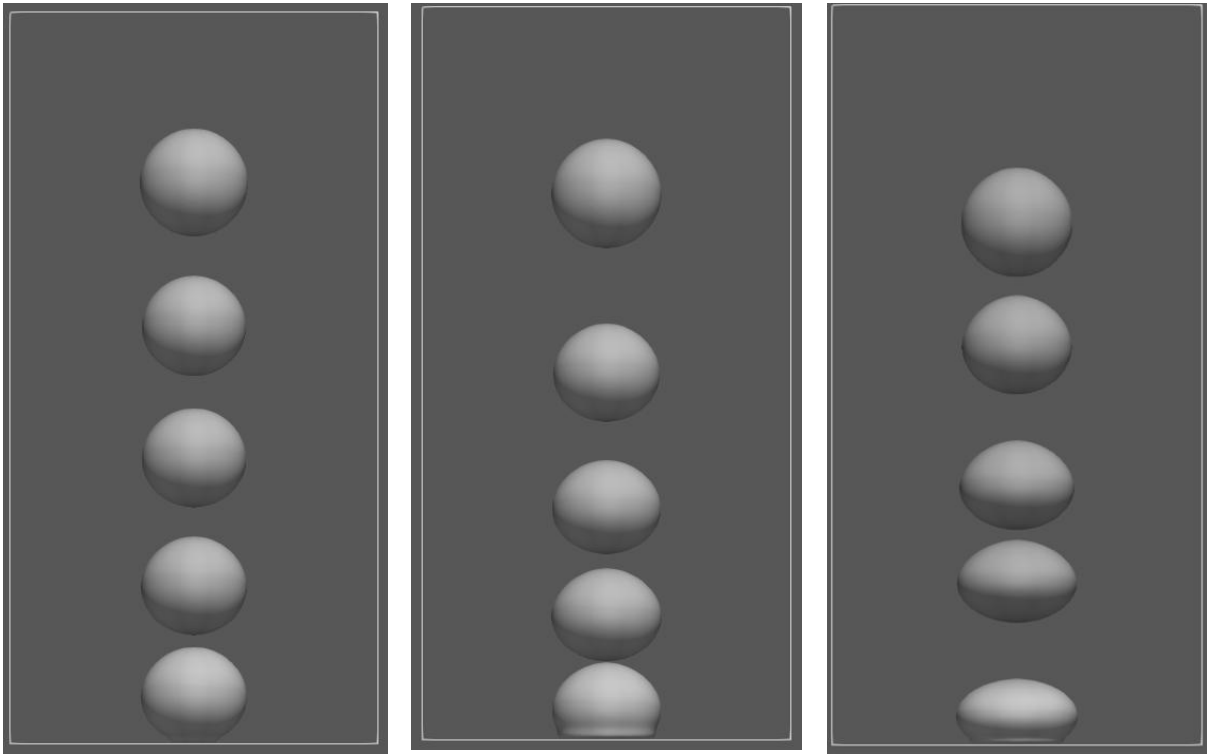


Figure 1. The representative simulation results of falling droplets for each case. (a) Case A (b) Case B (c) Case C.

Next, The time of droplet impact and equilibrium are shown in Fig.2. It is shown that the droplet impact on the surface for Case A, B, C are obtained at $4.44t$, $4.42t$, $4.33t$, respectively. The time-domain uses the dimensionless time domain of LBM. Here, it can be seen that Case C will rapidly go downwards than both cases A and B because of the higher value of gravitational force as well as Eo number. The droplet will collide to the surface in terms of droplet impact. The droplet will oscillate up to attaining the equilibrium state. After impact, the droplet surface will be flattened then back to its original rounded form. The oscillation phenomena occur due to the presence of both gravitational force and surface tension in the form of action-reaction force interaction. In the case of a smaller value of gravitational force, the action-reaction force will be decreased as well. This phenomenon causes oscillation of droplets will take a longer duration before reaching the equilibrium state. In contrast, the equilibrium state is quickly attained for a higher value of gravitational force. The simulation result shows that cases A, B, and C will reach the equilibrium state at $t = 7.42t$, $6.79t$, $6.35t$, respectively.

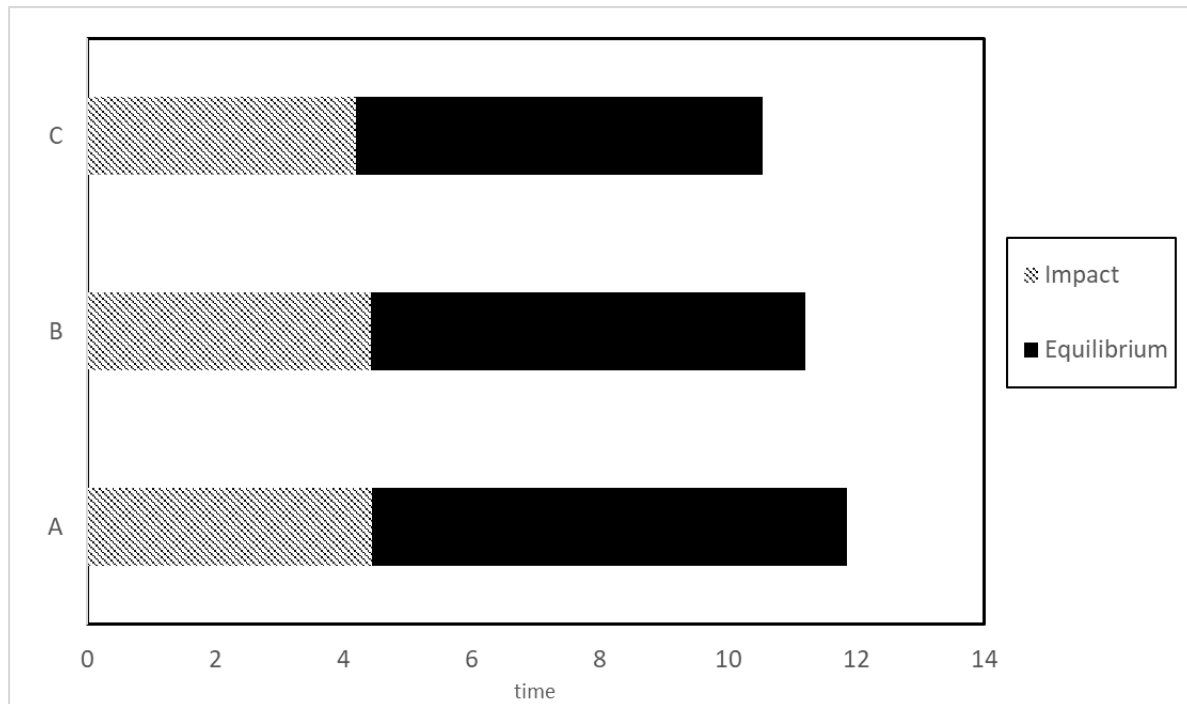


Figure 2. The time of droplet impact and equilibrium

4. Conclusion

In this study, the numerical investigation of droplet behavior, as well as its impact on the surface, is performed. The parametric study of the Eo number is obtained using LBM. Based on the results obtained, it is concluded that the gravitational force influences the downwards rate of the droplet. Furthermore, the shape of the droplet during falling was depended on the Eo number as well. The higher Eo number means higher gravitational force, hence the velocity of the droplet is increasing as well as the reaction force of surface tension. During impact, the droplet will fluctuate to attain the equilibrium state that is also influenced by the Eo number.

References

- [1] Anwar, S. (2019). Three-dimensional modeling of coalescence of bubbles using Lattice Boltzmann model. *Computers & Fluids*, 184, 178-186.
- [2] Sarkar, M. (2008). Multiphase flow modeling of spray cooling to improve heat transfer. University of Arkansas.
- [3] Selvam, R. P., Lin, L., & Ponnappan, R. (2005, February). Computational modeling of spray cooling: current status and future challenges. In *AIP conference proceedings* (Vol. 746, No. 1, pp. 55-63). American Institute of Physics.
- [4] Pollock, D. W. (1986). Simulation of fluid flow and energy transport processes associated with high-level radioactive waste disposal in unsaturated alluvium. *Water resources research*, 22(5), 765-775.
- [5] Ahlstrom, S. W., Foote, H. P., Arnett, R. C., Cole, C. R., & Serne, R. J. (1977). Multicomponent mass transport model: theory and numerical implementation (discrete-parcel-random-walk version) (No. BNWL-2127). Battelle Pacific Northwest Labs., Richland, Wash.(USA).
- [6] Adenekan, A. E., Patzek, T. W., & Pruess, K. (1993). Modeling of multiphase transport of multicomponent organic contaminants and heat in the subsurface: Numerical model formulation. *Water Resources Research*, 29(11), 3727-3740.
- [7] Armstrong, J. E., Frind, E. O., & McClellan, R. D. (1994). Nonequilibrium mass

- transfer between the vapor, aqueous, and solid phases in unsaturated soils during vapor extraction. *Water Resources Research*, 30(2), 355-368.
- [8] Fischer, U., Schulin, R., & Keller, M. (1996). Experimental and numerical investigation of soil vapor extraction. *Water Resources Research*, 32(12), 3413-3427.
- [9] Wu, H. C., Lin, H. J., Kuo, Y. C., & Hwang, W. S. (2004). Simulation of droplet ejection for a piezoelectric inkjet printing device. *Materials Transactions*, 45(3), 893-899.
- [10] Siregar, D. P. (2012). Numerical simulation of evaporation and absorption of inkjet printed droplets.
- [11] Bhattacharyya, S., Dey, K., Paul, A. R., & Biswas, R. (2020). A novel CFD analysis to minimize the spread of COVID-19 virus in hospital isolation room. *Chaos, Solitons & Fractals*, 139, 110294.
- [12] Roisman, I. V., Horvat, K., & Tropea, C. (2006). Spray impact: rim transverse instability initiating fingering and splash, and description of a secondary spray. *Physics of Fluids*, 18(10), 102104.
- [13] Bird, J. C., Dhiman, R., Kwon, H. M., & Varanasi, K. K. (2013). Reducing the contact time of a bouncing drop. *Nature*, 503(7476), 385-388.
- [14] Farhangi, M. M., Graham, P. J., Choudhury, N. R., & Dolatabadi, A. (2012). Induced detachment of coalescing droplets on superhydrophobic surfaces. *Langmuir*, 28(2), 1290-1303.
- [15] Bussmann, M., Chandra, S., & Mostaghimi, J. (2000). Modeling the splash of a droplet impacting a solid surface. *Physics of fluids*, 12(12), 3121-3132.
- [16] Tasoglu, S., Kaynak, G., Szeri, A. J., Demirci, U., & Muradoglu, M. (2010). Impact of a compound droplet on a flat surface: A model for single cell epitaxy. *Physics of Fluids*, 22(8), 082103.
- [17] Zheng, Y. Z., Li, Q., Zheng, Z. H., Zhu, J. F., & Cao, P. L. (2014). Modeling the impact, flattening and solidification of a molten droplet on a solid substrate during plasma spraying. *Applied surface science*, 317, 526-533.
- [18] Mehdi-Nejad, V., Mostaghimi, J., & Chandra, S. (2003). Air bubble entrapment under an impacting droplet. *Physics of fluids*, 15(1), 173-183.
- [19] Wu, J., Huang, J. J., & Yan, W. W. (2015). Lattice Boltzmann investigation of droplets impact behaviors onto a solid substrate. *Colloids and Surfaces A: Physicochemical and Engineering Aspects*, 484, 318-328.
- [20] Chen, L., Kang, Q., Mu, Y., He, Y. L., & Tao, W. Q. (2014). A critical review of the pseudopotential multiphase lattice Boltzmann model: Methods and applications. *International journal of heat and mass transfer*, 76, 210-236.
- [21] Huang, H., Sukop, M., & Lu, X. (2015). *Multiphase lattice Boltzmann methods: Theory and application*. John Wiley & Sons.

